

## Package Contents

- 1x 2.0MP Fixed Dome Camera
- 4x Mounting Screws
- 4x Drywall Anchors
- 1x Mounting Template

**NOTE:** 12V DC adapter not included.

## Safety Precautions

- Use an appropriate low voltage power cable to prevent fire or electrical shock.
- Make sure to install the camera in an area that can support the camera weight.
- There are no user serviceable parts inside the camera. Please do not disassemble the camera.
- Do not clean the lens cover with an abrasive cleaning material. Please use a soft cloth to clean the lens cover.

## 2.0MP Fixed WDR Dome Camera

**QUICK START GUIDE**  
English Version 1.0

**MODEL: C133ED/  
C133EDP**



# FLIR MPX™

**IT'S ALL ON THE WEB!**

VISIT

[www.flir.com/security/support](http://www.flir.com/security/support)

FLIR Systems, Inc., Copyright © 2015

As our products are subject to continuous improvement, FLIR Systems Inc. reserves the right to modify product design, specifications and prices, without notice and without incurring any obligation. E80E

# FLIR MPX™

[www.flir.com/security/support](http://www.flir.com/security/support)


## Installing the Camera

### ATTENTION:

Test the camera prior to selecting a permanent mounting location by temporarily connecting the camera(s) and cables to the DVR.

### To install the camera:

1. Rotate the camera base counter-clockwise to separate it from the ball camera and dome cover.
  2. Use the included mounting template to mark and drill holes for the included mounting screws.
- NOTE:** Insert the included drywall anchors if installing into drywall.
3. Feed the camera cable through the camera base.
  4. Connect the video and power cable as detailed in the section 'Setting up the Camera'.
  5. Attach the camera base to the mounting surface using the included screws.

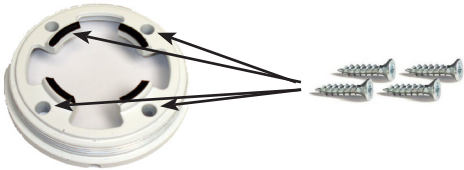

6. Position the dome cover over the ball camera and twist clockwise onto the camera base. Do not tighten completely.



7. Move the ball camera to the desired position. While holding the ball camera in place, twist the dome cover the rest of the way to secure it to the camera base. Holding the camera prevents it from moving while tightening the dome cover.

## Setting up the Camera

1. Connect one of the two BNC connectors on the camera to the video cable. See "Camera Wiring" for details.
2. **DC Power—Power Pigtail:** Connect the included power pigtail to the camera. Connect the terminating wires of the cable directly to the DC power source.

**OR**


**DC Power—Power Adapter:** Connect a 12V DC power adapter (not included) to the camera and a local power outlet.

**NOTE:** For pigtail connection with 12V DC, make sure to check polarity specifications on the power adapter.

### WARNING:

A REGULATED UL 12V DC power supply is REQUIRED for use with this camera. Use of a non-regulated, non-conforming power supply can damage this product and voids the warranty.

## Camera Wiring

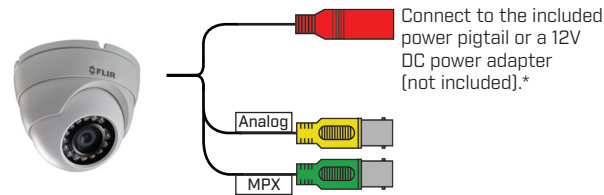

**MPX**  
Connect to an MPX DVR for 1080p viewing and recording.

**Analog**  
Connect to an analog DVR for 960H viewing and recording.

\* Camera focus may be affected if the power connection is too long. It is recommended not to extend the power connection past 200ft (61m).

## Extension Cable Options

The entire length of the cable run must be made using a single extension cable between the camera and the DVR.

Specification	Maximum Length
RG59 20AWG Conductor 95% Braid CSA/UL or C(UL) Approved	Up to 1000ft (300m) <sup>†</sup>
RG6 20AWG Conductor 95% Braid CSA/UL or C(UL) Approved	Up to 2000ft (600m) <sup>†</sup>
Analog CCTV Balun	Up to 300ft (91m)

<sup>†</sup> Long cable runs over 1000ft (300m) may be affected by electro-mechanical interference (EMI), which can increase the amount of noise in the picture in some installations.

## Camera Specifications

Image Sensor	1/2.7" 1080p, 2MP CMOS
Video Format	NTSC (C133ED) / PAL (C133EDP)
Effective Pixels	H: 1920 V: 1080
Resolution	Digital: 1080p Analog: 960H
Scan System	Progressive
Sync System	Internal
S / N Ratio	≥ 50dB (AGC Off)
Iris	AES
AES Shutter Speed	1/60 (1/50) ~ 1/100,000 sec.
Min. Illumination	0.01 Lux (IR Off) 0 Lux (IR LEDs On)
Video Output	Composite 1.0Vpp @ 75ohm
Lens Focal Length / Type	3.6mm F1.2 / Fixed
FOV (Horizontal)	90°
Termination	BNC Type
IR Range / Qty.	70ft / 21m; 12 IR LED's
Power Requirement	12V DC ±10%
Power Consumption	200mA MAX with IR LED
Operating Temp. Range	-22° ~ 140°F / -30° ~ 60°C
Environmental Rating	IP66
Dimensions (W x H)	3.7" x 3.0" 94mm x 75mm
Weight	0.65lbs / 0.29kg

## Camera Dimensions

